



# Sealex

Waterproofing Systems, Sealers & Sealants

## Seal-o-crete

### Seal-o-crete

#### DESCRIPTION:


Seal-O-Crete is a colorless, non-toxic, non-flammable, low viscosity, spray applied liquid formulation that provides a permanent internal moisture barrier for waterproofing and preserving new and old concrete.

#### RECOMMENDED USES

Seal-O-Crete preserves new or old concrete. Seal-O-Crete hardens new concrete and retards dusting without altering the surface appearance, texture, or bonding characteristics. The occlusive seal formed by Seal-O-Crete limits deterioration of concrete and dense cementitious masonry by resisting the penetration of acids, alkalis, oils and salts. Seal-O-Crete is formulated to perform against below grade hydrostatic pressure and is also excellent as an on grade moisture barrier.

#### FEATURES AND BENEFITS

- hardens concrete, minimizing surface dusting, pitting, spalling and hairline cracking
- inhibits water seepage and saponification
- resists acid, alkali and salt and oil attack
- seals against seepage below grade (i.e. from hydrostatic head)
- stops capillary action
- aids in curing new concrete uniformly, resisting spot drying and hairline shrinkage cracking – can be applied immediately after finishing
- ejects grease and oils which have penetrated concrete. Seal-O-Crete emulsifies such materials and floats them to the surface – resists such further penetration.
- prepares concrete surfaces for subsequent applications of paint, stains or adhesives specifically formulated for use on concrete surfaces – a test area should be tried before proceeding with any large areas of seamless materials – moisture testing is often used in this determination.
- promotes greater paint durability by helping to resist peeling, cracking or crumbling – increases bonding strength of latex and poly-vinyl paints

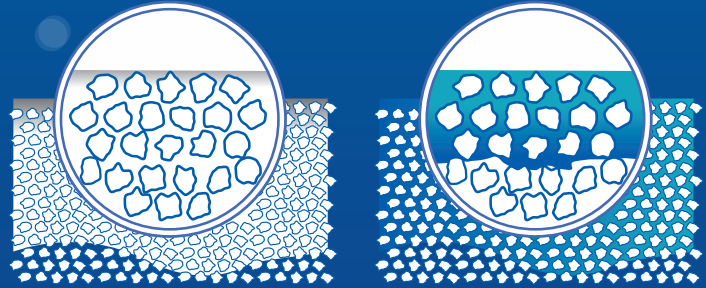

Seal-O-Crete penetrates into the concrete where it reacts with free lime and alkali to fill the voids and bond the particles into a solid mass, creating a permanent seal.

Code:	Description	Pack QTY
SAC-10	Seal-o-crete penetrating sealer	32 / Pallet



15

5 Balook Drive, Holmwood Business Park,  
Beresfield, NSW 2322  
Fax: 1300 855 598 sales@sealex.com.au

Phone: 1300 555 955