



Sealex

Waterproofing Systems, Sealers & Sealants

TYPICAL MEMBRANE APPLICATION SHEET No. POLYGLAS4




Sealex Polyglas 4 BRIDGE DECK MEMBRANE SYSTEM

Description:

POLYGLAS 4 is an exceptionally high performance, prefabricated, modified bitumen membrane consisting of proprietary waterproofing compound, re-inforced with spunbonded non-woven polyester mat and fiberglass mat.

Features:

- a) Total impermeability for total waterproofing
- b) Excellent resistance to aging and weathering
- c) Outstanding bondability and seam integrity
- d) Flexibility at low temperature
- e) Stability at high temperature
- f) Very high resistance to impact & puncture.
- g) Variety of finishes for exposed and covered applications
- h) High tensile strength and tear resistance
- i) Isotropic properties
- j) Increased resistance to hydraulic pressure

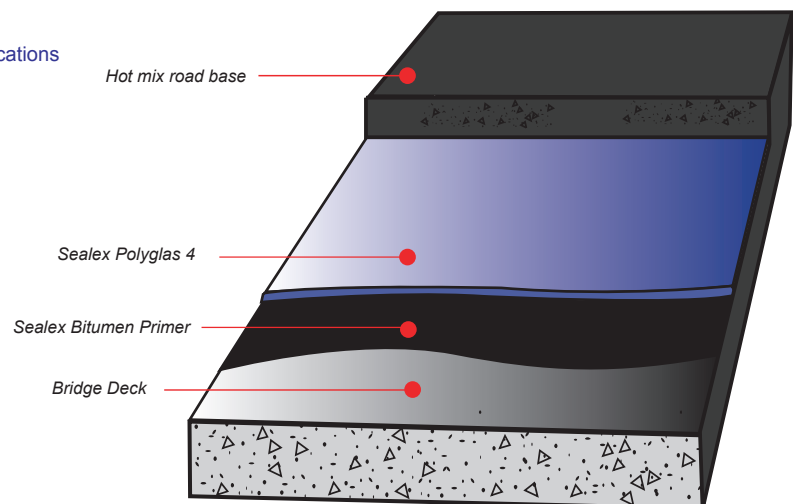

Substrates

- a) Concrete decks to falls

Typical Application

Bridge Decks

Draft Specifications

The waterproofing membrane is to be a 2 layer Sealex Polyglas membrane system as supplied by Sealex Industries phone 1300 555 955. The membrane system is to be applied to the substrate in accordance with manufacturers printed recommendations.

Sealex Industries

PO Box 7140, Penrith NSW 2750
Fax: 1300 855 598
info@sealex.com.au

Ph: 1300 555 955